



External-driven Piezo Transducer

TFM-63

Rev.2



FEATURES:



- Low Frequency
- Low Current Drain
- Light and Compact

APPLICATIONS:

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

CHARACTERISTICS:

DIMENSIONS: (Unit: mm)

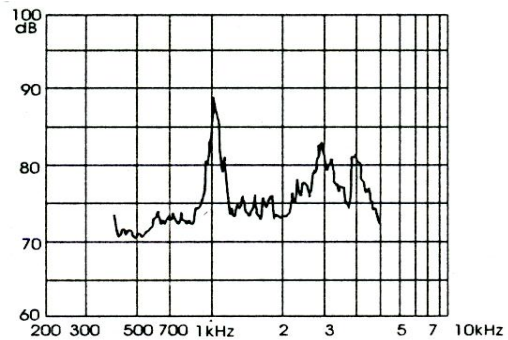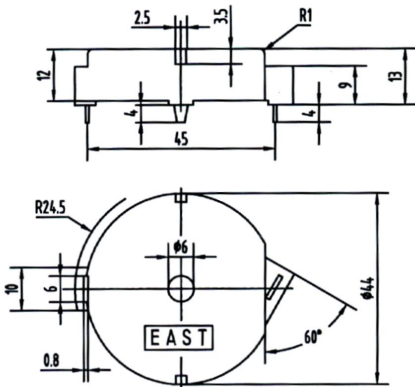

ELECTRICAL SPECIFICATIONS:

Min. Sound Pressure Level at

1.0kHz/30V_{p-p} Square Wave/100cm.....70dB(A)

Capacitance at 120Hz.....68nF±30%

Allowable Input Voltage.....40V_{p-p}

Resonant Frequency.....1.0±0.3kHz

Operating Temperature.....-25~+70°C

Case Material/Color.....ABS/Black

Weight.....8g

PACKING INFORMATION:

Packing: 720 pcs per export carton

Carton Size: 47.5×30.5×32.5 cm

G. Weight: 7.3 kgs N. Weight: 5.8 kgs

Address: Multitrack GmbH, Pfaffenrain 22, 35606 Solms, Germany

Tel: +49-6442-9220950, Fax: +49-3212-1258768

