

RoHS
Compliant**External-driven Piezo Transducer****TFM-75B**

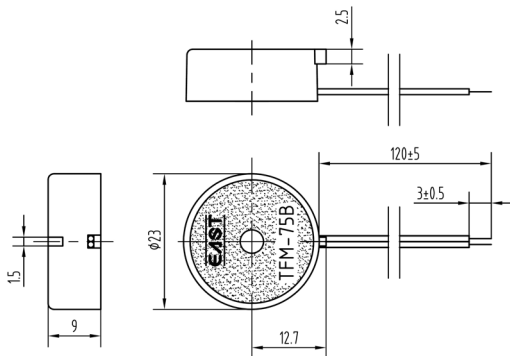
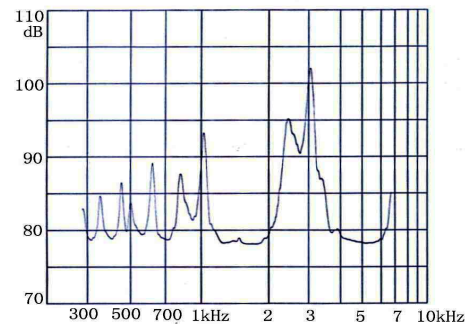
Rev.2

**FEATURES:**

- Low Frequency
- Low Current Drain

APPLICATIONS:

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

DIMENSIONS: (Unit: mm)**CHARACTERISTICS:****ELECTRICAL SPECIFICATIONS:**

Min. Sound Pressure Level at

2.5kHz/9Vp-p Square Wave/10cm.....88dB(A)

Capacitance at 1000Hz.....24nF±30%

Allowable Input Voltage.....40Vp-p

Max. Consumption at

2.5kHz/9Vp-p Square Wave.....12mA

Resonant Frequency.....2.5±0.5kHz

Operating Temperature.....-20~+70°C

Weigh.....2.5g

Case Material /Color.....ABS (PA-757)/Black

Wire Standard.....UL1095-30AWG

PACKING INFORMATION:

Packing: 1680 pcs per export carton

Carton Size: 47×30.5×35 cm

G. Weight: 6.0 kgs N. Weight: 4.5 kgs

Address: Multitrack GmbH, Pfaffenrain 22, 35606 Solms, Germany

Tel: +49-6442-9220950, Fax: +49-3212-1258768

