

**External-driven Piezo Transducer**

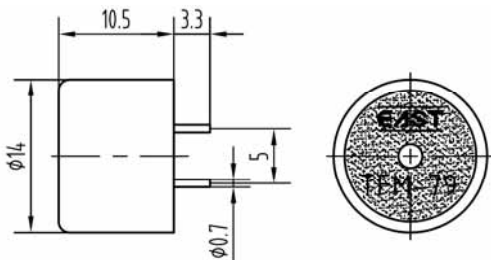
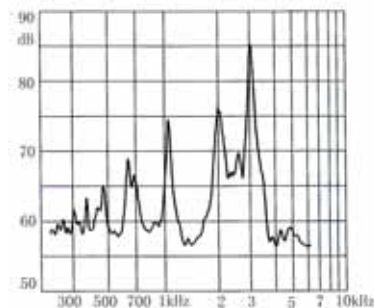
Rev.2

TFM-79**FEATURES:**

- Low Frequency
- Low Current Drain

APPLICATIONS:

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

DIMENSIONS: (Unit: mm)**CHARACTERISTICS:****ELECTRICAL SPECIFICATIONS:**

| | |
|--|-------------------|
| Min. Sound Pressure Level at 2.0kHz/5Vp-p Square Wave/10cm..... | 70dB(A) |
| Capacitance at 120Hz..... | 13.5nF±30% |
| Allowable Input Voltage..... | 30Vp-p |
| Max. Consumption at 2.0kHz/5Vp-p Square Wave..... | 4mA |
| Resonant Frequency..... | 2.0±0.5kHz |
| Operating Temperature..... | -30~+70°C |
| Weigh..... | 1.1g |
| Case Material /Color..... | PC (IR2200)/Black |

PACKING INFORMATION:

Packing: 5200pcs per export carton

Carton Size:47x30.5 x33cm

G. Weight: 7.2 kgs N. Weight: 5.7 kgs

Address: Multitrack GmbH, Pfaffenrain 22, 35606 Solms, Germany

Tel: +49-6442-9220950, Fax: +49-3212-1258768

