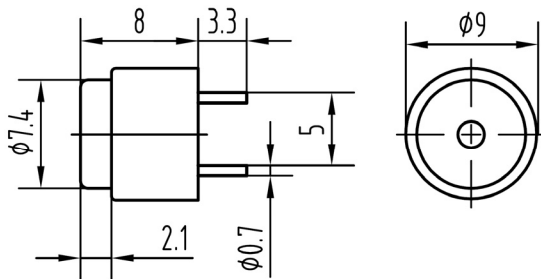
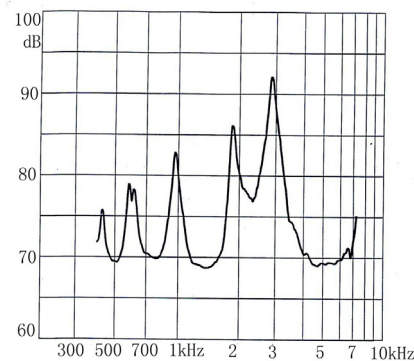


**External-driven Piezo Transducer****TFM-81****FEATURES:**

- Low Frequency
- Low Current Drain

**APPLICATIONS:**

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

**DIMENSIONS: (Unit: mm)****CHARACTERISTICS:****ELECTRICAL SPECIFICATIONS:**

Min. Sound Pressure Level at

2.8kHz/10Vp-p Square Wave/10cm.....75dB(A)

Capacitance at 120Hz.....5.6nF±30%

Allowable Input Voltage.....30Vp-p

Max. Consumption at

2.8kHz/10Vp-p Square Wave.....4mA

Resonant Frequency.....2.8±0.5kHz

Operating Temperature.....-30~+95°C

Weigh.....0.5g

Case Material /Color.....PC (IR2200)/Black

**PACKING INFORMATION:**

Packing: 10000 pcs per export carton

Carton Size:47 × 30.5 × 27cm

G. Weight:6.5 kgs N. Weight: 5.0 kgs

Address: Multitrack GmbH, Pfaffenrain 22, 35606 Solms, Germany

Tel: +49-6442-9220950, Fax: +49-3212-1258768

