



RoHS  
Compliant

### Piezo Buzzer

## FM-24F-907A

Rev.2




#### FEATURES:

- High Output
- Sealed Type
- High Reliability


#### APPLICATIONS:

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

#### DIMENSIONS:( Unit: mm)

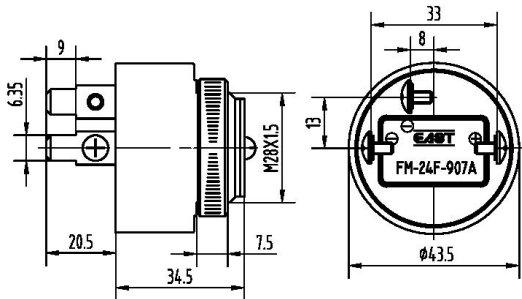

#### CHARACTERISTICS:

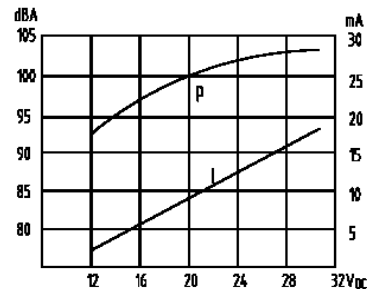

#### ELECTRICAL SPECIFICATIONS :

Min. Sound Pressure Level at

24V <sub>DC</sub> /60cm.....	90dB
Rated Voltage.....	24V <sub>DC</sub>
Operating Voltage.....	12~28V <sub>DC</sub>
Max. Consumption.....	20mA/24V <sub>DC</sub>
Oscillating Frequency.....	3.0±0.5kHz
Tone Nature.....	Continuous + Slow Pulse
Operating Temperature.....	-20~+70°C
Case Material/Color.....	ABS/Black
Weight.....	35g

Note: 1. Slow Pulse  $f_s=1.0\text{Hz} \pm 20\%$  2. This product are epoxy-potting type.

#### PACKING INFORMATION:

Packing: 200 pcs per export carton

Carton Size: 41×26 ×33 cm

G. Weight: 8.5 kgs N. Weight: 7.0kgs

Address: Multitrack GmbH, Pfaffenrain 22, 35606 Solms, Germany

Tel: +49-6442-9220950, Fax: +49-3212-1258768

