

**Piezo Buzzer**RoHS
Compliant


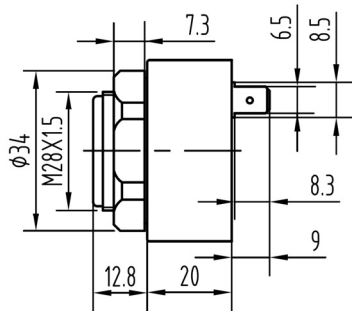
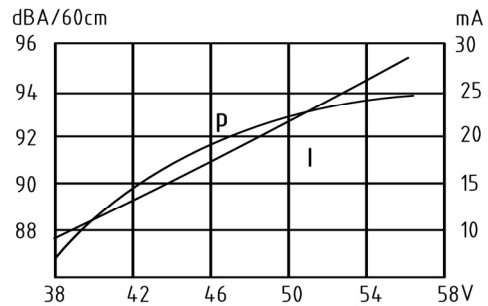
Rev.2

FM-48AA-907A**FEATURES:**

- High Output
- High Reliability
- Wide Voltage

APPLICATIONS:

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

DIMENSIONS: (Unit: mm)**CHARACTERISTICS:****ELECTRICAL SPECIFICATIONS:**

Min. Sound Pressure Level at

48V _{DC/AC} /60cm.....	90dB(A)
Rated Voltage.....	48V _{DC/AC}
Operating Voltage.....	38~58V _{DC/AC}
Max. Consumption.....	30mA/48V _{DC/AC}
Oscillating Frequency.....	2.9±0.5 kHz
Tone Nature.....	Continuous+ Slow Pulse
Operating Temperature.....	-20~+70°C
Case Material/Color.....	Fire-resistance ABS/Black
Weight.....	35g

Note: 1. Slow Pulse $f_s=1.2\text{Hz}\pm 20\%$ 2. This product is epoxy-potting type.

PACKING INFORMATION:

Packing: 200 pcs per export carton
 Carton Size: 47×30.5×31 cm
 G. Weight: 10.5 kgs N. Weight: 7.0 kgs
 Address: Multitrack GmbH, Pfaffenrain 22, 35606 Solms, Germany
 Tel: +49-6442-9220950, Fax: +49-3212-1258768

